


ADVANCED DIAGNOSTIC LOAD CELL TESTER

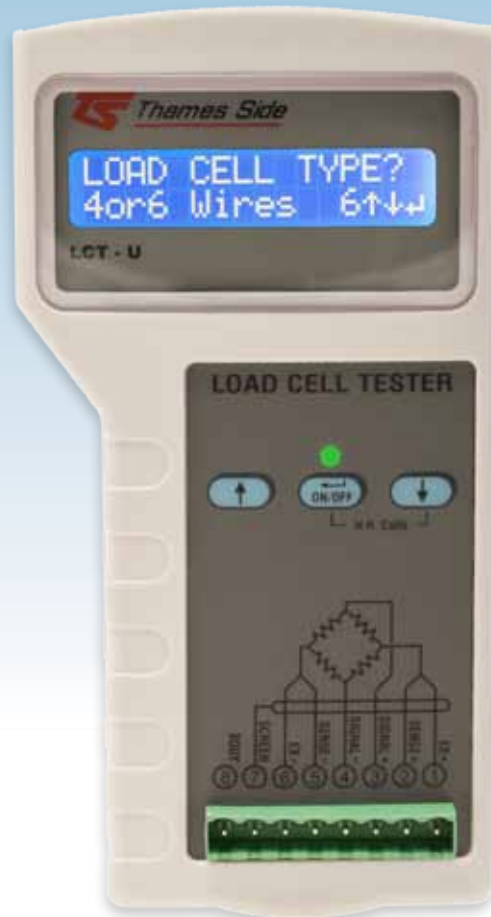

The advanced Load Cell Tester Model LCT-U is a stand-alone hand-held device specially designed for fast, comprehensive troubleshooting of strain gauge load cells. The LCT-U can quickly diagnose problems with all common types of load cell available today, including 6-wire load cells (with sense wires).

The LCT-U provides the operator with all the essential data about the load-cell being tested, including the bridge resistance and integrity, physical distortion (possibly caused by overload, shock load or metal fatigue) and insulation resistance (which can highlight moisture or chemical ingress).

- Fast, accurate testing of load cells and scales – full test complete within 5 seconds
- Very user friendly – pin assignment is printed on front of tester
- Coloured LEDs highlight suspicious readings
- Can check alignment of multiple load cell scales
- Operated by standard batteries for portability
- Continuous signal reading allows for checking of linearity and repeatability
- Can check for physical distortion of a load cell
- Works with 4-wire or 6-wire load cells
- Rugged ABS enclosure and rubber cover
- Lightweight
- Ideal tool for installation/commissioning engineers

LCT-U

technical specification...



LCT-U Advanced Load Cell Tester

Specifications	
Bridge testing voltage	1.25 VDC
High resistance testing voltage	10 VDC
A/D resolution	16 bit
Bridge input and output resistance	Up to 5k Ω at 0.5 Ω resolution
Sense resistance (for 6 wire load cells)	Up to 500 Ω at 0.1 Ω resolution
Resistance accuracy	$\pm 1 \Omega$
Insulation resistance	Maximum > 5 G Ω ; Minimum <10 M Ω
High resistance accuracy	10%
Load cell output in percentage of full scale (input resistance > 175 Ω)	$\pm 250\%$ at 0.01% resolution and 0.1% accuracy
Gain adjustment	0.1 to 5 mv/V (in steps of 0.01)

Additional Data	
Connector	8-pin with screw terminals (supplied with the unit)
Power source	4 x Type AA batteries (not supplied)
Display	Alphanumeric: 16 characters, 2 lines
Size	150 mm x 80 mm x 28 mm
Weight	250 grams

For further information, including a video user guide, please visit our website www.thames-side.com



AUSTSYS TECHNOLOGIES PTY LTD

9 Yiannis Court, Springvale VIC 3171, Australia
T: 1300 212 174

info@austsystechnologies.com.au www.austsystechnologies.com.au

Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.



THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way,
Reading, Berkshire RG30 6AZ, UK

Issue: LCT-U.12.13



www.austsystechnologies.com.au